

BORAL Unispan


BORAL Unispan is a lightweight 9.5mm thickness resilient plasterboard. It is specially formulated as a Ceiling Lining for Framing Spacing at up to 610mm centres*. BORAL Unispan has a superior anti-sag performance and is faster and easier to install due to the fact that it is approximately 25% lighter than 12.5mm plasterboard and less fasteners are required.

Product Data


Thickness	Metric (mm)	9.5mm
Edge Details:	Recessed Edge	Yes
	Square Edge	Yes
Width (mm):		1220
Length (mm):		2440
Weight:		9.5mm = 5.85kg/m ²
Product Standard:		BS 1230 part 1, ASTM C36
Product Testing:		BS 476 part 4 / part 6 / part 7, ASTM C473

* The above lengths are standard sizes, Boral Plasterboard is able to produce any required sheet length depending upon the order size.


BORAL Unispan Commercial Ceiling System

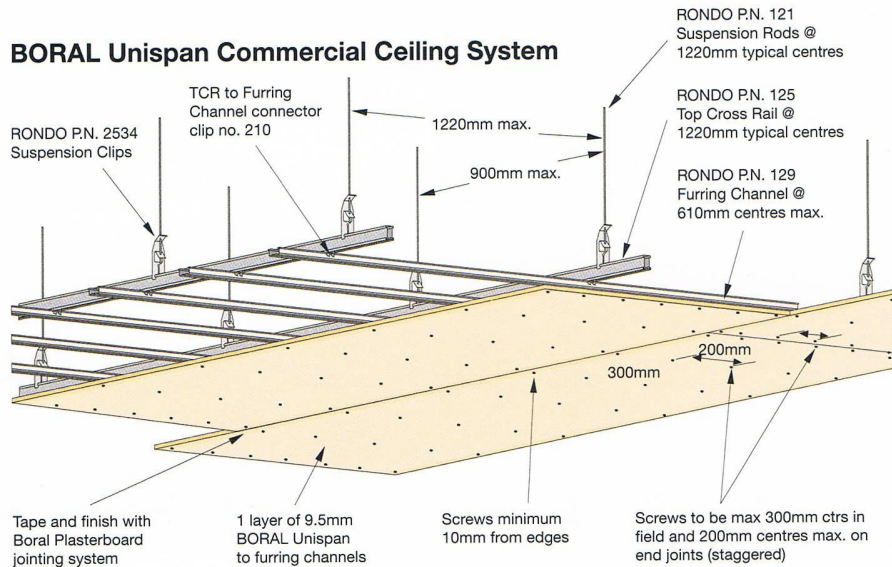


BORAL Unispan Residential Ceiling System (Recommended)

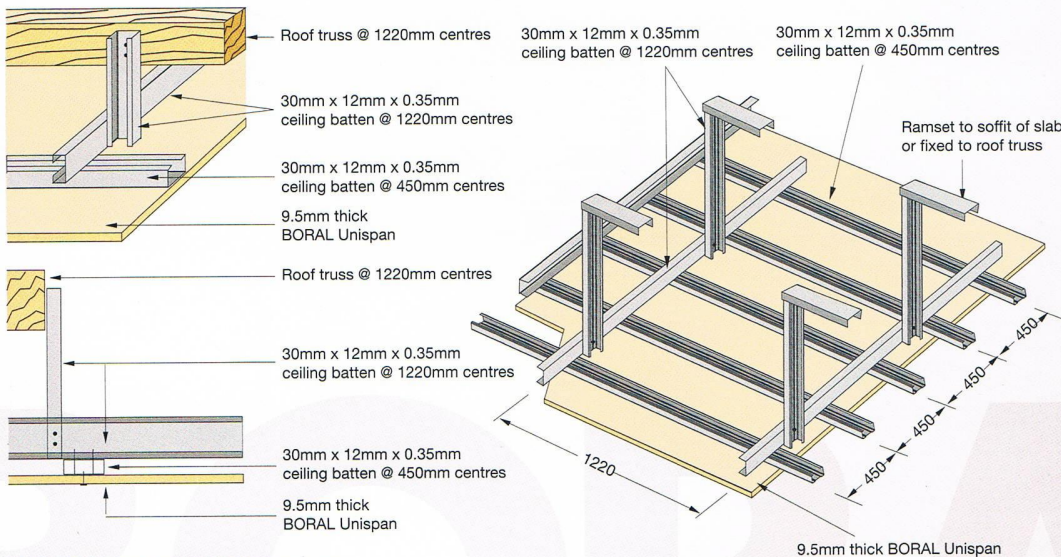

Note: Not recommended for external use.

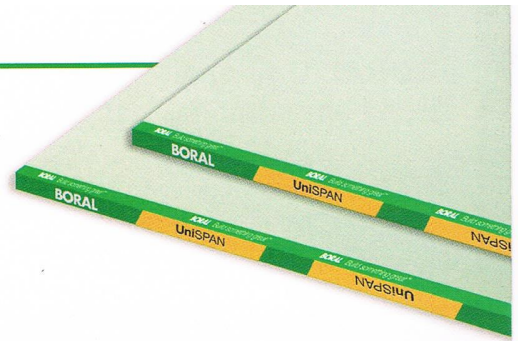

Product Enhancement of BORAL Unispan

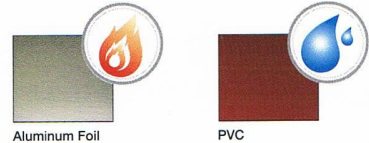

Protective Backing:


Upon request BORAL Unispan can be provided with a special backing on the Plasterboard reverse side:

- Aluminium Foil Backing is designed to use in areas of extremely high temperature.
- PVC Backing is designed for high humidity area to prevent sagging. It acts as a barrier against moisture.

How to specify this product:


Supply and install BORAL Unispan 9.5mm as shown on the relevant drawings. BORAL Unispan must be installed and finished in accordance to manufacturer's specification.

For more information, please contact our technical service.



Boral Plasterboard (Malaysia) Sdn Bhd

BORAL Unispan
Build something great™



Unispan

Light Weight, Quicker Installation

BORAL Unispan is a lightweight resilient plasterboard specially developed to be fixed on ceiling framing members that are spaced up to 610mm apart. The unique features of this product allow for improved on-site productivity and material usage.

